

水冷卻機

WATER COOLER UNIT



確保加工精度 提升生產效率 延長機械壽命 免用冷卻水塔

揚帆集團

揚帆精密股份有限公司

揚帆興業股份有限公司

地址：桃園市楊梅區(幼獅工業區)高獅路935號

電話：03-496-7111 傳真：03-496-7112

電子信箱：info@yoho-precision.com

網站：http://www.yangfan.com.tw

YOHO GROUP

YOHO PRECISION CO., LTD.

YANGFAN DEVELOPMENT CO., LTD.

No.935, Gaoshi Rd., Yangmei Dist,
Taoyuan City, Taiwan (R.O.C)





TEL : 886-3-496-7111

FAX : 886-3-496-7112

E-mail : info@yoho-precision.com

http : //www.yangfan.com.tw



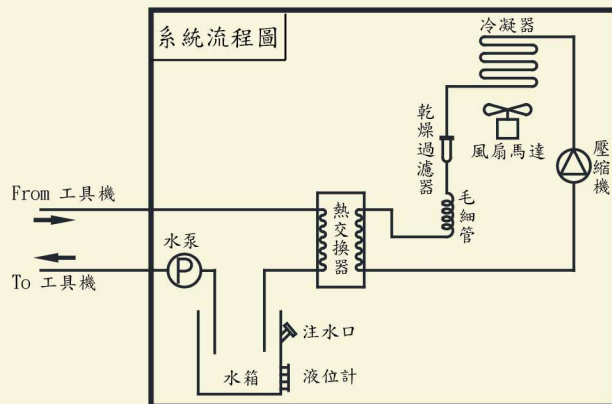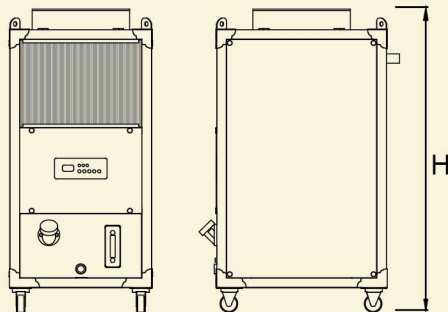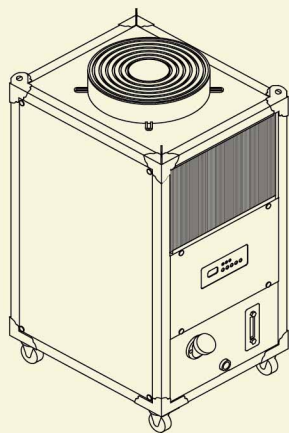

標準規格 Standard Specilctions

型號 MODEL			YHWN-04	YHWN-06	YHWN-08	YHWN-12	YHWN-18	YHWN-24	YHWN-36
冷卻能力 Cooling Capacity	kcal/h		840/1000	1400/1500	1600/2000	2600/3000	3750/4500	5000/6000	7500/9000
	W		980/1170	1630/1750	1860/2325	2900/3500	4350/5250	5820/6980	8720/10470
	BTU/h		3360/4000	5600/6000	6400/8000	10000/12000	15000/18000	20000/24000	30000/36000
電源 Power source			3φ 220-240/380V 50Hz			/	3φ 220-240/380V 60Hz		
消耗功率 Power Consumption	總入力 Power Input	W	1081/1296	1225/1470	1437/1725	1800/2160	2250/2700	2929/3515	3520/4224
	壓縮機 Compressor	W	363/435	471/565	683/820	967/1160	1375/1650	2054/2465	2500/3000
	風扇 Fan	W	93/111	129/155	129/155	208/250	250/300	250/300	395/474
	泵浦 Pump	W				625/750			
水流量 Water Flow		L/min	32	32	40	40	40	40	50
入/出口管徑 Piping Diameter		PT"	1/2	1/2	3/4	3/4	3/4	3/4	1
最大揚程 Max Lift From Pump		M	28/40						
水箱容積 Tank Capacity (option)		L	16	22	22	39	47	47	56
外型尺寸 Dimension	W	mm	399	447	447	550	616	616	666
	D	mm	479	542	542	590	616	616	666
	H	mm	894	896	896	1074	1074	1162	1340
重量 Weight	不含水箱 W/O Tank	KG	48	59	65	96	110	116	133
	含水箱 W/ Tank	KG	55	67	73	108	123	129	148
噪音 Noise Level			70dB(A)以下 Below 70 dB(A)				80dB(A)以下 Below 80 dB(A)		

1. 表列冷卻能力在環境溫度 32°C，出口水溫 22°C 的條件下測得。
2. 溫度控制型式 X 為固定溫度型(設定範圍 10°C~40°C)，Y 為環境溫度追蹤型，Z 為機體溫追蹤型(設定範圍-9.9°C~9.9°C)。
3. 本機組使用範圍在環境溫度為 10~40°C；水溫度為 10~30°C。

1. The cooling capacity is based on the condition of ambient temperature 32°C, outlet water temperature 22°C.
2. The temperature control: X is fixed temperature control type (setting range 10~40°C), Y is differential temperature control type tracing ambient, Z is differential temperature control type tracing machine body temperature(setting range -9.9°C~+9.9°C).
3. Use range: ambient temperature 10~40°C, water temperature 10~30°C.