

YOHO WATER COOLER UNIT




Precision guarantee Higher efficiency Extended service life Use no cooling tower

YOHO GROUP
YOHO PRECISION CO., LTD.
YANGFAN DEVELOPMENT CO.,LTD.
No.935, Gaoshi Rd., Yangmei Dist,
Taoyuan City, Taiwan (R.O.C)
TEL : 886-3-496-7111
FAX : 886-3-496-7112
E-mail : info@yoho-precision.com
<http://www.yangfan.com.tw>

Agent



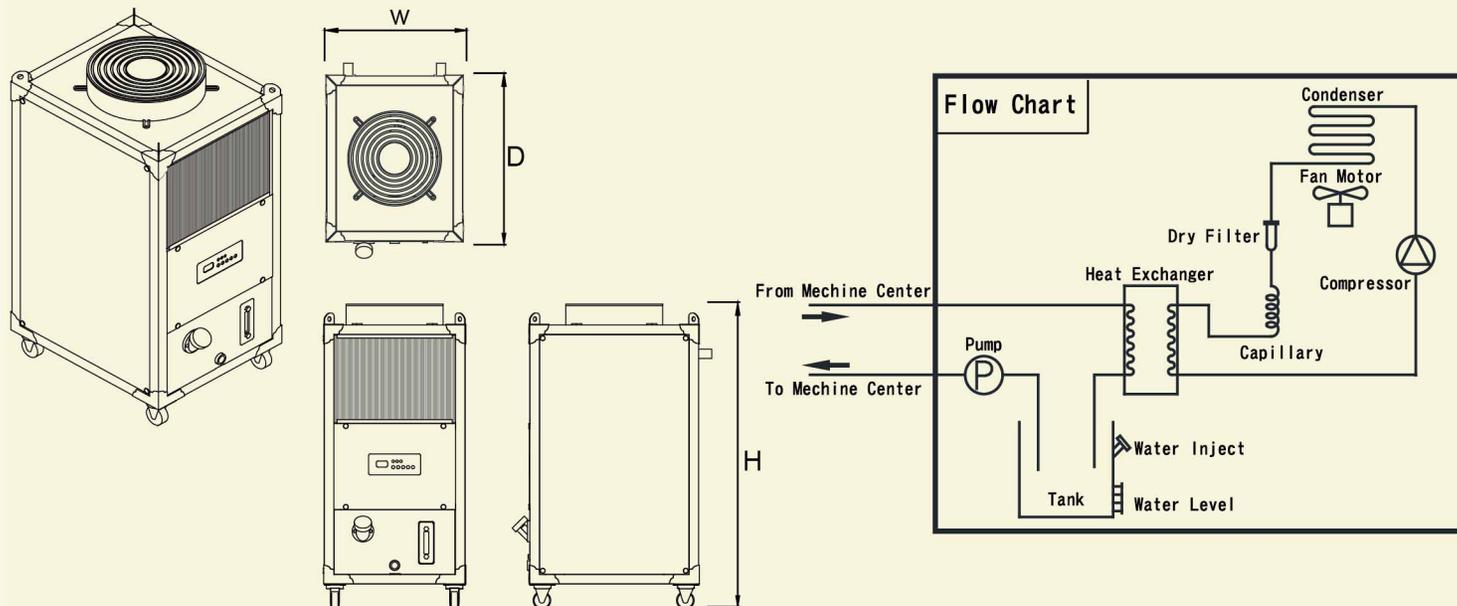

Standard Specifications

MODEL		YHWN-04	YHWN-06	YHWN-08	YHWN-12	YHWN-18	YHWN-24	YHWN-36	
Cooling Capacity	kcal/h	840/1000	1400/1500	1600/2000	2600/3000	3750/4500	5000/6000	7500/9000	
	W	980/1170	1630/1750	1860/2325	2900/3500	4350/5250	5820/6980	8720/10470	
	BTU/h	3360/4000	5600/6000	6400/8000	10000/12000	15000/18000	20000/24000	30000/36000	
Power source		3φ 220-240/380V 50Hz			/	3φ 220-240/380V 60Hz			
Power Consumption	Power Input	W	1081/1296	1225/1470	1437/1725	1800/2160	2250/2700	2929/3515	3520/4224
	Compressor	W	363/435	471/565	683/820	967/1160	1375/1650	2054/2465	2500/3000
	Fan	W	93/111	129/155	129/155	208/250	250/300	250/300	395/474
	Pump	W				625/750			
Water Flow	L/min	32	32	40	40	40	40	50	
Piping Diameter	PT"	1/2	1/2	3/4	3/4	3/4	3/4	1	
Max Lift From Pump	M	28/40							
Tank Capacity (option)	L	16	22	22	39	47	47	56	
Dimension	W	mm	399	447	447	550	616	616	666
	D	mm	479	542	542	590	616	616	666
	H	mm	894	896	896	1074	1074	1162	1340
Weight	W/O Tank	KG	48	59	65	96	110	116	133
	W/ Tank	KG	55	67	73	108	123	129	148
Noise Level		Below 70 dB(A)					Below 80 dB(A)		

1. The cooling capacity is based on the condition of ambient temperature 32°C, outlet water temperature 22°C.

2. The temperature control: X is fixed temperature control type (setting range 10~40°C), Y is differential temperature control type tracing ambient, Z is differential temperature control type tracing machine body temperature (setting range -9.9°C~9.9°C).

3. Use range: ambient temperature 10~40°C, water temperature 10~30°C.